

Industrial Estate Valdeconsejo, Aneto St., 8-A, 50410
Cuarte de Huerva (Zaragoza)

REPORT 21AH07623

TESTS ON PREFABRICATED BOARDS

<ul style="list-style-type: none">CLIENT
<ul style="list-style-type: none">- Name: ANDARAGON, S.L.U.- Address: Industrial Estate Las Norias, 19-A, Muel (Zaragoza)
<ul style="list-style-type: none">QUOTATION
<ul style="list-style-type: none">- Name: MECHANICAL CHARACTERISTICS OF FIBRE REINFORCED BOARDS- Quotation No.: 21AH0428
<ul style="list-style-type: none">SPECIMENS
<ul style="list-style-type: none">- Specimen reference: 2021/02143-2- Date of entry: 27/05/2021
<ul style="list-style-type: none">TESTS CARRIED OUT
<ul style="list-style-type: none">- Bending strength (ambient conditions), UNE EN 12467.- Date of test: 18/06/2021
<ul style="list-style-type: none">STANDARDS USED
<ul style="list-style-type: none">- UNE-EN 12467. Flat boards of fibre-reinforced cement. Product specifications and test methods.

Industrial Estate Valdeconsejo, Aneto St., 8-A, 50410
Cuarte de Huerva (Zaragoza)

1.- PRECEDENTS

The applicant provides the laboratory with a TABIHAUS® prefabricated panel of 2,600 X 1,200 X 60 mm for a flexural strength test.

The test panel consists of two 8 mm TABIHAUS® boards and a 50 mm extruded polystyrene (XPS) core.

TABIHAUS® panel: *Composed of TABIHAUS® boards of 8 mm on both sides, composed of Epsom salt reinforced with double mesh of fibreglass, natural longitudinal fibres dispersed in orientation, spherical foam particles, retardants, and liquid waterproofing, adhered to high density XPS (XPS-EN-13164-T3-CS(10/Y)300 DS(70,90)), leaving it in its inner core, by means of the manufacturing process of ANDARAGÓN S.L.U., with bicomponent glues, and double pressing in vacuum and mechanical pressure, in a controlled process in air-conditioned rooms - temperature and humidity.*


2.- TEST METHODOLOGY

Before the test is carried out, the specimens are conditioned and kept in laboratory conditions for 7-14 days.

Rectangular specimens of suitable dimensions are prepared for the test. These are cut in both longitudinal and transverse directions.

The specimens are placed with their underside resting on two supports and the load is applied by means of a central bar.

The load is applied steadily and is carried out in such a way that breakage occurs between 10 and 30 seconds after the start of the load application.

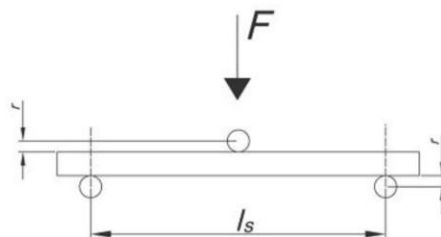

Charging device

Industrial Estate Valdeconsejo, Aneto St., 8-A, 50410
Cuarte de Huerva (Zaragoza)

The Modulus of Rupture MOR, in megapascals, is calculated by the following expression:

$$\text{MOR} = \frac{3Fl_s}{2be^2}$$

Where

- F is the breaking load, in newtons
- L_s is the support spacing, in mm
- b is the width of the specimen, mm
- e is the thickness of the specimen, in mm

The specimen value is calculated as the arithmetic mean of the values, in both directions, of the specimens tested.

3.- RESULTS OBTAINED

Transversal direction						
Specimen	L (mm)	b (mm)	e (mm)	Load (kg)	Bending Strength (MPa)	Breakage d. (mm)
T1	800	300	66,2	333	3,0	12,0
T2	800	300	66,5	311	2,8	12,8
T3	800	300	66,5	286	2,5	16,5
T4	800	300	66,8	331	2,9	22,4
T5	800	300	66,5	304	2,7	13,8
Average	800	300	66,5	313	2,8	15,5

Industrial Estate Valdeconsejo, Aneto St., 8-A, 50410
Cuarte de Huerva (Zaragoza)

Longitudinal direction						
Specimen	L (mm)	b (mm)	e (mm)	Load (kg)	Bending Strength (MPa)	Breakage d. (mm)
L1	800	300	66,2	290	2,6	16,8
L2	800	300	66,5	286	2,5	16,6
L3	800	300	66,4	302	2,7	15,4
L4	800	300	66,4	283	2,5	15,1
L5	800	300	66,4	267	2,4	13,6
Average	800	300	66,4	286	2,5	15,5

Modulus of rupture MOR	2,7 MPa
-------------------------------	----------------

Zaragoza, 21th June 2021


Jefe de Ensayos de Materiales
Gustavo Royo Lantarón
Lcdo. C.C. Geológicas





Vº Bº del Director del Laboratorio
Arantxa Mendizábal Aguirre
Ingeniero Industrial